# Linea RGBW 36W

LINEAR LED

## Product Code

ML13

## Technical Description

### High Quality, 4-in-1 Chip

- Safety input 24V DC
- 36W/m 96 LEDs/m 12mm width, cuttable at 62.5mm
- FPC copper: 30Z
- Available as a 5m continuous run as standard
- If you require a customised version of this product, please contact us

*Electrical and Photometric data shown are per metre




### Electrical Specifications

| | |
|---|---|
| **System Power** | 36W |
| **Input Voltage** | 24V DC |
| **Control Type** | Control Based Dimming |

### Photometric Info

| | |
|---|---|
| **CRI** | CRI90 |
| **CCT** | RGBW (3000K), RGBW (4000K) |
| **Beam Angle** | 120° |
| **Lumen Maintenance** | > 50, 000hrs (L70 B10) |
| **MacAdam Step** | 3 Step |

### Physical Characteristics

| | |
|---|---|
| **Installation Method** | Surface Mounted |
| **Trim Finish** | White |
| **IP Rating / IK Rating** | IP20 |
| **Cuttable Length** | 62.5mm |
| **LEDs/m** | 96 |

## Polar Distribution Diagrams
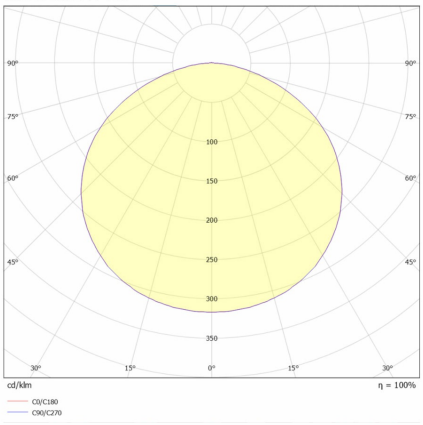
Linear RGBW 120°