





## Slim, smooth and with style

- Sleek and compact design Ø62mm
- Both 1-Circuit and 3-Circuit mounting configurations available
- Beamspreads: Spot, Narrow, Medium, Wide
- Comes in mini and maxi size versions

## Product info

System Lumen Range	1250lm
System Power	15W
Forward Current	350mA
System Efficacy Range	83lm/W
Input Voltage	240V
Body/Trim Colour	White, Black
Installation Method	3-Circuit Track Mounted, 1-Circuit Track Mounted, Surface Mounted
LED Brand	Citizen
IP Rating	IP20
Diffuser	Clear
Dimming Type	Phase-Cut Dimmable, Non-Dimmable
Maximum Tilt Angle	90°
Maximum Rotation Angle	350°
Accessories	Without Accessory
Custom Dimming Type	Available on request

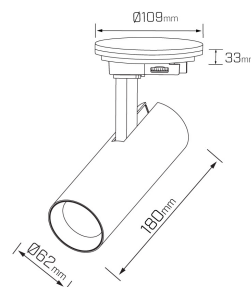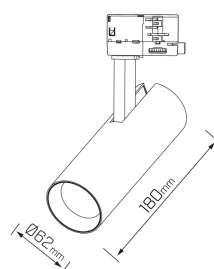

## Photometric info

Colour Rendering Index (CRI)	CRI90
Colour Temperature (CCT)	2700K, 3000K, 3500K, 4000K
Beam Angle	17°, 20°, 40°, 55°
Light Output Ratio (LOR)	>77%
Custom Colour Temperature (CCT)	Available on request
Revit Files	Please choose Beam Angle / Power within the Revit file

## Compliance




## Packaging


Box Weight	0.60kg
Box Dimensions L x W x H mm	280 mm x 105 mm x 80 mm
Boxes per Carton	16
Carton Dimensions L x W x H mm	440 mm x 300 mm x 340 mm

## Polar distribution diagrams


Catania Mini 17°

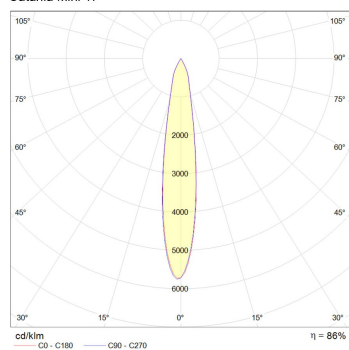

Catania Mini 20°

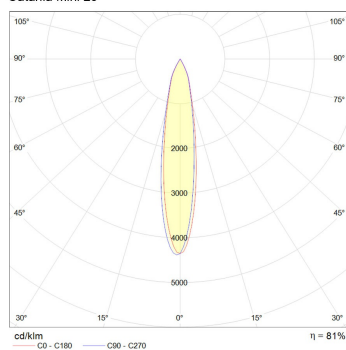

Catania Mini 40°

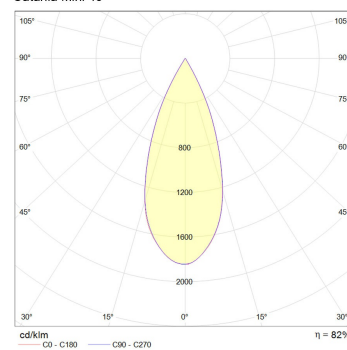

Catania Mini 55°

