


Classic and compact



- Also comes in $\Phi 90$ mm cut-out version
- System lumen range from 750lm - 950lm
- IP rated at IP40
- Compact body with efficient optics

Product info

System Lumen Range	750lm — 950lm
System Power	9.5W, 13.5W
Forward Current	180mA, 250mA
System Efficacy (max.)	79lm/W
Body/Trim Colour	White, Black
Installation Method	Fixed Recessed
IP Rating	IP40
Dimming Type	Non-Dimmable, Phase-Cut Dimmable, DALI Dimmable
Accessories	Without Accessory
Custom Dimming Type	Available on request



Photometric info

Colour Rendering Index (CRI)	CRI90
Colour Temperature (CCT)	2700K, 3000K, 4000K
Beam Angle	24°, 35°, 60°
Custom Colour Temperature (CCT)	Available on request

Compliance and Features


**RoHS**

Stirling 70


DOWNLIGHT | Product code MD05

Polar distribution diagrams

Stirling 70 24°

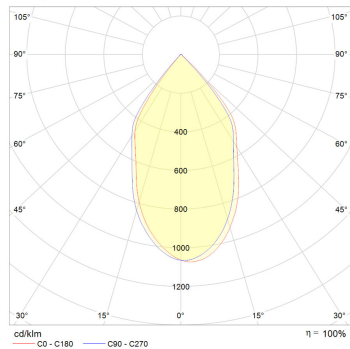

Stirling 70 36°

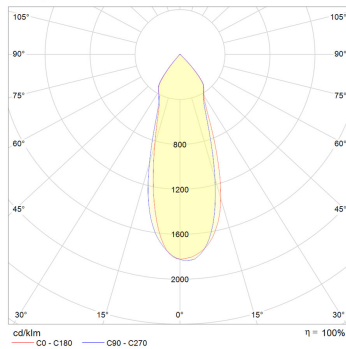

Stirling 70 59°

