




Trunking Redefined


- Highly energy efficient LED Trunking System with efficacy of up to 155lm/W at CRI80
- Pre-wired with 5 wires. 7 or 11 wires available.
- Multiple beam angle options of 24°, 45°, 90°, Single Asymmetric (25°), Double Asymmetric (25°)
- Amazing add-on features: Emergency/Sensor/Dimming/Track modules
- Easy installation: simply click to connect multiple, pre-wired lengths together
- Ideal for supermarket aisles, retail and commercial lighting

Product info

System Lumen Range	2400lm — 12200lm
System Power	16W, 20W, 26W, 32W, 40W, 50W, 65W, 80W
Forward Current	400mA, 500mA, 650mA, 800mA, 1000mA, 1300mA, 1650mA, 2000mA
System Efficacy (max.)	153lm/W
Input Voltage	240V
Body/Trim Colour	White
Installation Method	Surface Mounted / Suspended
LED Brand	Hongli
Dimming Type	Non-Dimmable
Accessories	Without Accessory
Length	567mm, 1410mm
Custom Dimming Type	Available on Request



Note: Drawing not to scale

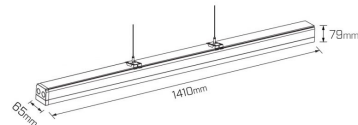

Note: Drawing not to scale

Photometric info

Colour Rendering Index (CRI)	CRI80
Colour Temperature (CCT)	4000K
Beam Angle	1x25° Left Asymmetric, 1x25° Right Asymmetric, 24°, 2x25° Asymmetric, 45°, 90°
Unified Glare Rating (UGR)	<16, <22, <19
Custom Colour Temperature (CCT)	Available on Request

Compliance and Features

Ce




Packaging


Box Weight	4.2Kgs
Boxes per Carton	4, 0
Carton Weight	18.4Kgs

Polar distribution diagrams


Mons-C 1 x 25°




Mons-C 24°



Mons-C 2 x 25°

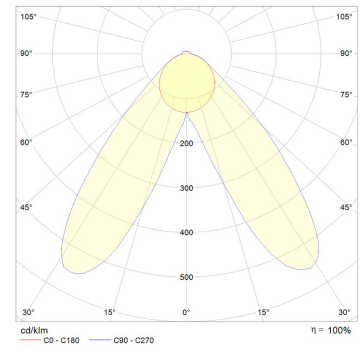

Mons-C 45°



Mons-C 90°

