


Mons-C

TRUNKING SYSTEMS

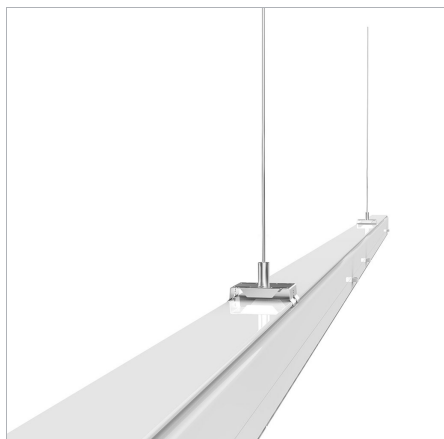

Product Code

MR15



Technical Description

Trunking Redefined

- Highly energy efficient LED Trunking System with efficacy of up to 165lm/W at CRI80
- Pre-wired with 5 wires, 7 or 11 wires available
- Multiple beam angle options of 24°, 45°, 90°, Single Asymmetric (25°), Double Asymmetric (25°)
- Amazing add-on features: Emergency/Sensor/Dimming/Track modules
- Easy installation: simply click to connect multiple, pre-wired lengths together
- Ideal for supermarket aisles, retail and commercial lighting
- If you require a customised version of this product, please [contact us](#).

Electrical Specifications


System Power	16W, 20W, 26W, 32W, 40W, 50W, 65W, 80W
Input Voltage	240V
Control Type	Non-Dimmable
System Efficacy (max.)	165lm/W

Physical Characteristics


Installation Method	Surface Mounted / Suspended
Trim Finish	White
Length	567mm, 1410mm
Weight	4.2KgsKgs

Photometric Info

Luminaire Lumens	5000lm, 6600lm, 2400lm, 3100lm, 4100lm, 8000lm, 10200lm, 12200lm
CRI	CRI80
CCT	4000K
Beam Angle	1x25° Left Asymmetric, 1x25° Right Asymmetric, 24°, 2x25° Asymmetric, 45°, 90°

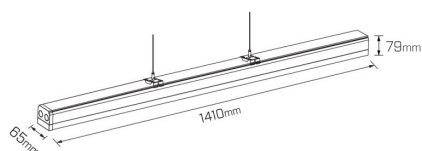


Note: Drawing not to scale

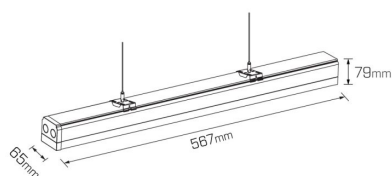


Note: Drawing not to scale

Polar Distribution Diagrams


Mons-C 90°

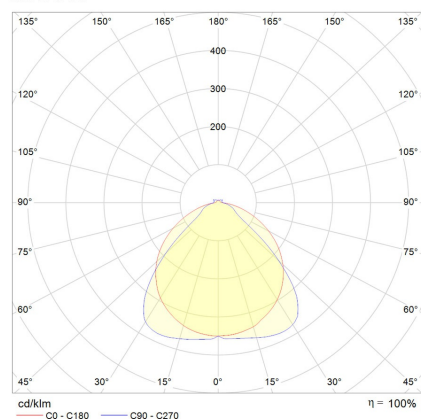

Mons-C 45°

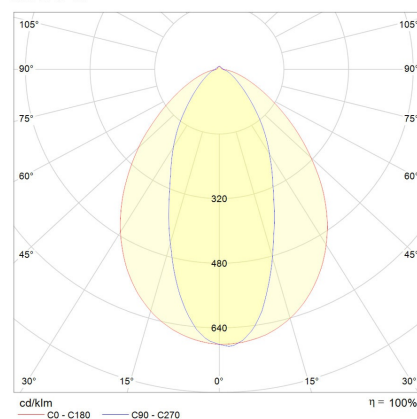


Mons-C 2 x 25°

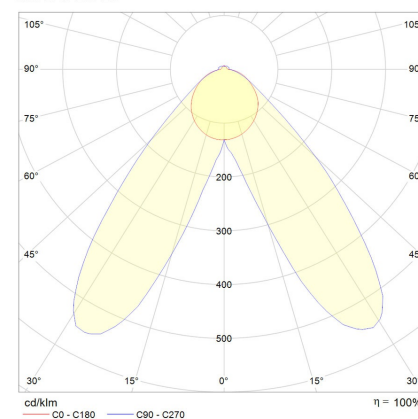

Mons-C

TRUNKING SYSTEMS

Mons-C 24°

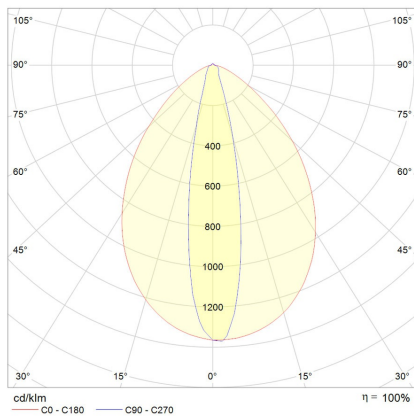

Mons-C 1 x 25°

