


What a bright idea!



- Wattage options: 9.5W, 13.5W
- IP40 rated downlight
- Phase-cut dimmable option available
- Beam angle options: 25°, 35°, 55°

Product info

System Lumen Range	750lm — 1000lm
System Power	9.5W, 13.5W
Forward Current	350mA, 500mA
System Efficacy Range	74lm/W to 79lm/W
Body/Trim Colour	White, Black
Installation Method	Fixed Recessed
IP Rating	IP40
Dimming Type	Non-Dimmable, Phase-Cut Dimmable, DALI Dimmable
Accessories	Without Accessory
Custom Dimming Type	Available on request

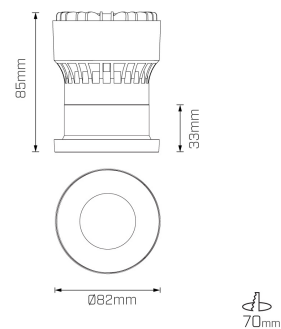

Photometric info

Colour Rendering Index (CRI)	CRI80
Colour Temperature (CCT)	2700K, 3000K, 4000K
Beam Angle	25°, 35°, 55°
Light Output Ratio (LOR)	>85%
Custom Colour Temperature (CCT)	Available on request

Compliance



RoHS



Capella Tall

DOWNLIGHT

Product code MD12

mondolux.com.au

MONDOLUX™

Packaging


Box Dimensions L x W x H mm 115 mm x 115 mm x 115 mm

Boxes per Carton 20


Carton Dimensions L x W x H mm 570 mm x 250 mm x 240 mm

Polar distribution diagrams

Capella Tall 25°

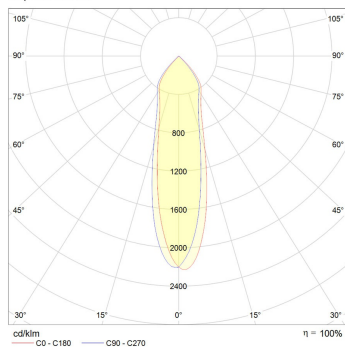

Capella Tall 35°

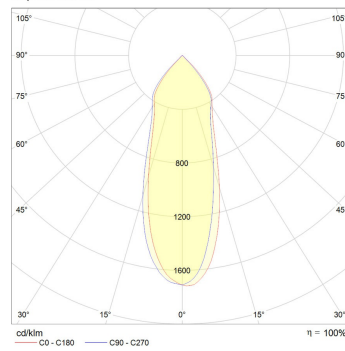

Capella Tall 55°

