



Product Code

MB06



Technical Description

The ideal protected T5/T8 fluoro lighting replacement

- IP65 rated with Tri-proof protection from dust, corrosion and pressure
- High Efficacy of up to 139lm/W for energy savings
- Microwave sensor option also available
- Suitable for plant rooms, service stations, factories & warehouses
- Quick & easy installation using mounting clips

Electrical Specifications



System Power	20W, 36W, 40W
Input Voltage	240V
Control Type	Non-Dimmable
System Efficacy (max.)	139lm/W

Photometric Info

Luminaire Lumens	2700lm, 5000lm, 4750lm
CRI	CRI80
CCT	4000K, 5000K
Beam Angle	120°

Physical Characteristics

Installation Method	Surface Mounted / Suspended
Trim Finish	Silver, White
Custom Dimming Type	Available on request
IP Rating / IK Rating	IP65
Weight	1.1Kgs, 1.15KgsKgs
Diffuser	Frosted

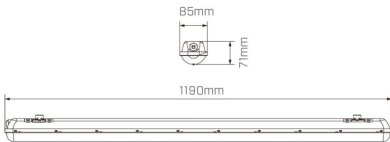

Polar Distribution Diagrams

Saive 120°

