


Venice Mini Surface Mounted

DOWNLIGHT



Product Code
MD04SM



Technical Description

Surface mounted superstar

- A surface mounted version of our popular [Venice Mini downlight](#), and part of the Mondolux Venice family
 - Suitable for residential and architectural lighting applications, with an impressively low-glare reflector and flexible design
 - Improved efficacy (up to 135lm/W at CRI90) and tight 2-step binning with our new Mondolux HE+ chip*
 - Reduces the overall power consumption while meeting the new BCA regulations for retail applications*
 - Available in standard, high-output HE+ and full-spectrum high-CRI ComfoLED versions
 - If you require a customised version of this product, please [contact us](#)
- *Applicable for HE+ version

Electrical Specifications

| | |
|------------------------|---|
| System Power | 19W, 27W |
| Input Voltage | 240V |
| Control Type | ON/OFF, 0-10V, Phase-Cut, DALI, Casambi |
| System Efficacy (max.) | 135lm/W |
| Power Factor | >0.9 |

Physical Characteristics


| | |
|-----------------------|-----------------|
| Installation Method | Surface Mounted |
| Trim Finish | White, Black |
| IP Rating / IK Rating | IP20 |
| Weight | 0.9Kgs |
| Fitting Material | Aluminium |

Photometric Info


| | |
|-------------------|---|
| Luminaire Lumens | 1770lm, 2460lm, 2570lm, 3450lm |
| CRI | CRi90 |
| CCT | 3000K, 3000K HE+, 3000K Vivid, 3500K, 3500K HE+, 4000K, 4000K HE+ |
| Beam Angle | 14°, 20°, 42° |
| Lumen Maintenance | >65000hrs (L70B10) |
| MacAdam Step | 3 Step |

Polar Distribution Diagrams

Venice Mini Surface Mounted 42°

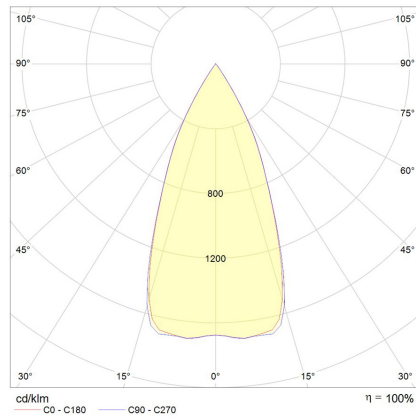

Venice Mini Surface Mounted 20°

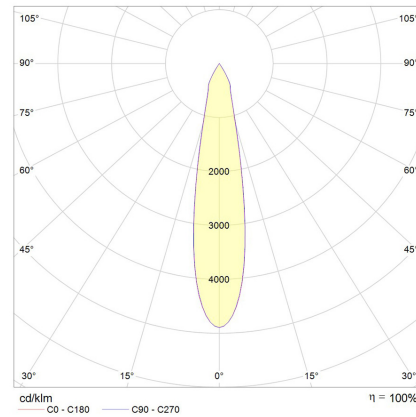

Venice Mini Surface Mounted 14°

