

Product Code

MO91



Technical Description

Simplicity meets strength

- Designed specifically for commercial outdoor use, the Rho Mini Wall Light boasts exceptional IP65 and IK06 ratings with CRI90 as standard and a 5-year warranty\*
- Cross beam Gen-2 lens
- UV stabilised matte finish in black
- Also available in Midi, Mini Up/Down and Midi Up/Down options
- 3 step MacAdam binning
- If you require a customised version of this product, please [contact us](#).

\*Please see Warranty Terms & Conditions for further information.

Electrical Specifications

System Power	7W
Input Voltage	240V
Control Type	Phase-Cut
System Efficacy (max.)	66lm/W
Power Factor	0.9

Photometric Info


Luminaire Lumens	465lm
CRI	CRI90
CCT	3000K
Beam Angle	14°, 32°, 48°
Lumen Maintenance	> 61,000hrs (L70 B10)
MacAdam Step	3 Step

Physical Characteristics


Installation Method	Surface Mounted
Trim Finish	Black
IP Rating / IK Rating	IP65/ IK06
Fitting Material	Aluminium

Polar Distribution Diagrams

Rho Mini 48°

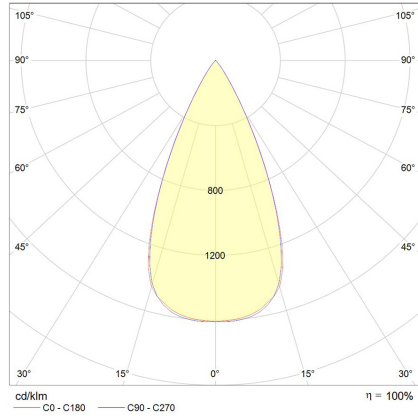

Rho Mini 32°

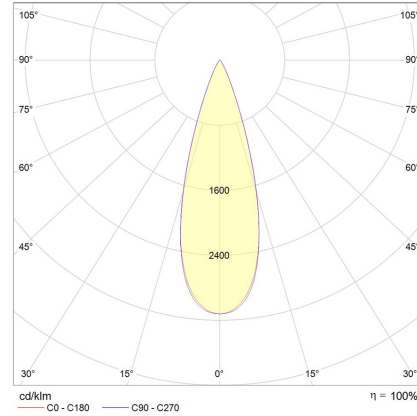

Rho Mini 14°

