



Product Code  
MO93



Technical Description

Minimalism, maximised power

- Crafted exclusively for commercial outdoor applications, the Rho Midi Wall Light features unparalleled IP65 and IK06 ratings, along with standard CRI90 and a 5-year warranty\*
- Cross beam Gen-2 lens
- UV stabilised matte finish in black
- Also available in Mini, Mini Up/Down and Midi Up/Down options
- 3 step MacAdam binning
- If you require a customised version of this product, please [contact us](#).


\*Please see Warranty Terms & Conditions for further information

Electrical Specifications

System Power	11W
Input Voltage	240V
Control Type	Phase-Cut
System Efficacy (max.)	103lm/W
Power Factor	0.9

Physical Characteristics

Installation Method	Surface Mounted
Trim Finish	Black
IP Rating / IK Rating	IP65/ IK06
Fitting Material	Aluminium

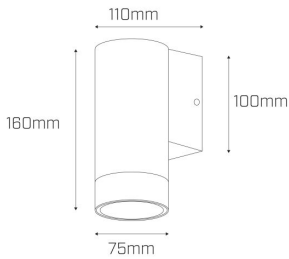


Photometric Info


Luminaire Lumens	1130lm
CRI	CRI90
CCT	3000K
Beam Angle	16°, 30°, 55°
Lumen Maintenance	> 61,000hrs (L70 B10)
MacAdam Step	3 Step

Polar Distribution Diagrams

Rho Midi 55°

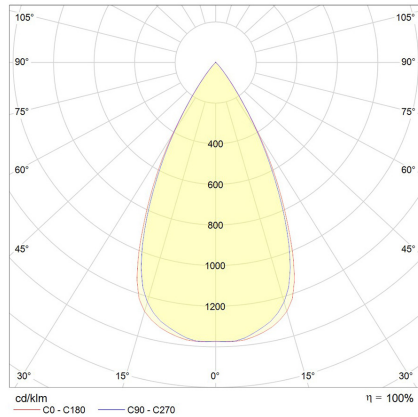

Rho Midi 30°

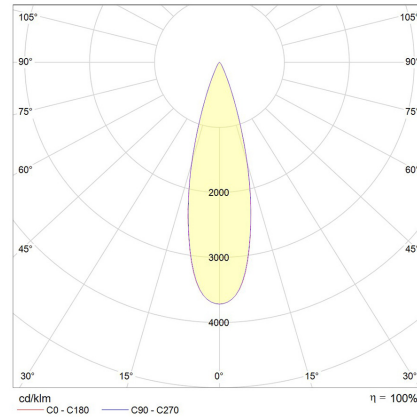

Rho Midi 16°

