

Rho Midi Up/Down

OUTDOOR



Product Code

MO94



Technical Description

Unassuming, but unstoppable

- The Rho Midi Up/Down Wall Light is engineered for commercial outdoor applications, providing exceptional IP65 and IK06 ratings, standard CRI90, and a 5-year warranty*
- Features two non-adjustable beams of light, making it an ideal choice for brightening surrounding areas and highlighting feature walls
- Cross beam Gen-2 lens
- UV stabilised matte finish in black
- Also available in Mini, Midi and Mini Up/Down options
- 3 step MacAdam binning
- If you require a customised version of this product, please [contact us](#)

***Please see Warranty Terms & Conditions for further information**

Electrical Specifications


System Power	20W
Input Voltage	240V
Control Type	Phase-Cut
System Efficacy (max.)	103lm/W
Power Factor	0.9

Photometric Info

Luminaire Lumens	2050lm
CRI	CRI90
CCT	3000K
Beam Angle	2x16°, 2x30°, 2x55°
Lumen Maintenance	> 62, 850hrs (L70 B10)
MacAdam Step	3 Step


Physical Characteristics

Installation Method	Surface Mounted
Trim Finish	Black
IP Rating / IK Rating	IP65/ IK06
Fitting Material	Aluminium

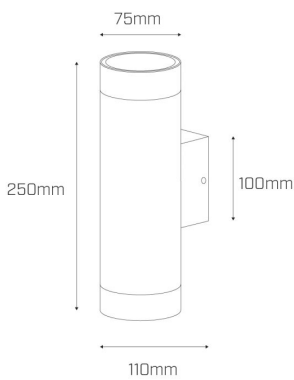


Polar Distribution Diagrams

Rho Midi Up/Down 2x55°

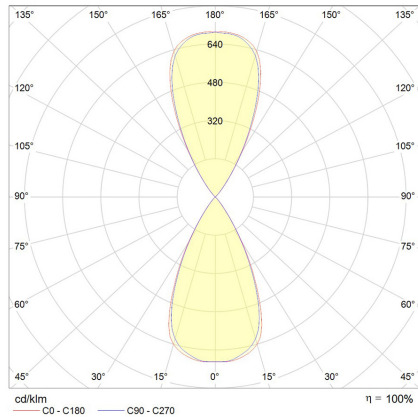

Rho Midi Up/Down 2x30°

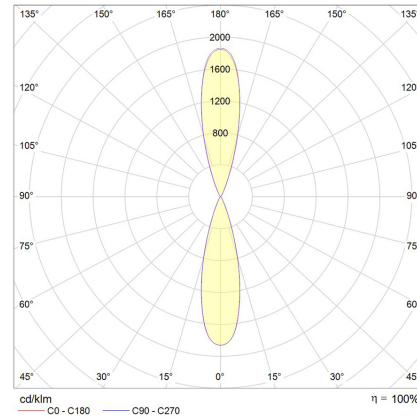

Rho Midi Up/Down 2x16°

