

Messina Midi

SPOTLIGHT



Product Code

MS22



Technical Description

Small body, not-so-small output

- Introducing the Messina Midi Spotlight, a model of compact elegance combined with powerful performance
- Despite its small body, it delivers a robust output with an impressive luminous flux of up to 3450lm at CRI90, ensuring bright and accurate colour rendering
- Cleverly engineered with a sleek and slim gearbox, showcasing the ingenuity of sophisticated design
- Beam spreads: Narrow (20°), Medium (30°), and Wide (60°)
- Wall washer version available upon request
- If you require a customised version of this product, please [contact us](#)

Electrical Specifications


System Power	20W, 28W, 36W
Input Voltage	240V
Control Type	ON/OFF
System Efficacy (max.)	100lm/W

Physical Characteristics

Installation Method	3-Circuit Track Mounted
Trim Finish	White, Black
IP Rating / IK Rating	IP20
Weight	1.3Kgs
Maximum Tilt Angle	90°
Maximum Rotation Angle	350°


Photometric Info

Luminaire Lumens	1350lm, 2000lm, 1900lm, 2800lm, 2350lm, 3450lm
CRI	CRI90
CCT	3000K, 3000K Vivid, 3500K, 4000K
Beam Angle	20°, 30°, 60°

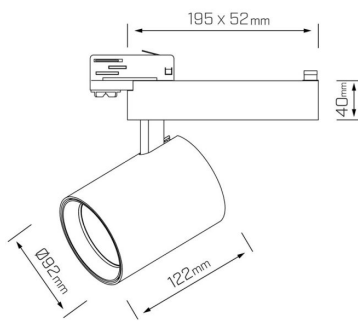


Polar Distribution Diagrams

Messina Midi 59°

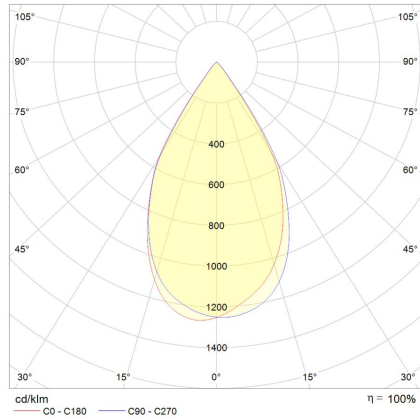

Messina Midi 30°

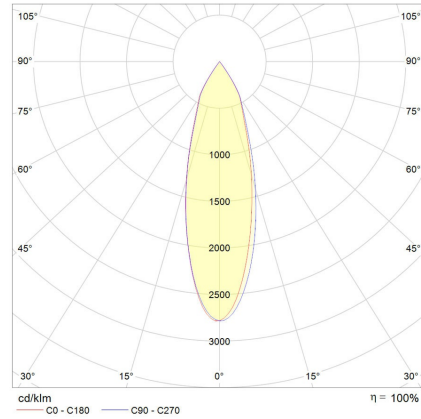

Messina Midi 20°

