


The right light to the bright light..



- IP40 rated downlight with square trim
- Fully adjustable facilitating strong points of focus
- Wattage options: 9.5W, 13.5W
- Beam angle options: 24°, 35°, 60°
- Phase-cut and DALI dimmable options available

Product info

System Lumen Range	750lm — 950lm
System Power	9.5W, 13.5W
Forward Current	180mA, 250mA
System Efficacy (max.)	79lm/W
Body/Trim Colour	White, Black
Installation Method	Adjustable Recessed
IP Rating	IP40
Dimming Type	Non-Dimmable, Phase-Cut Dimmable, DALI Dimmable
Accessories	Without Accessory

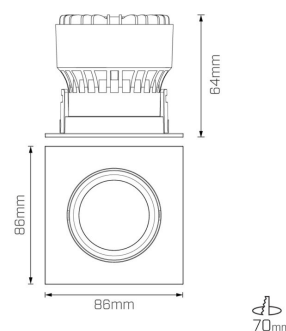

Photometric info

Colour Rendering Index (CRI)	CRI90
Colour Temperature (CCT)	2700K, 3000K, 4000K
Beam Angle	24°, 35°, 60°

Compliance and Features




RoHS

Stirling Square


DOWNLIGHT | Product code MD14

Polar distribution diagrams

Stirling Square 24°

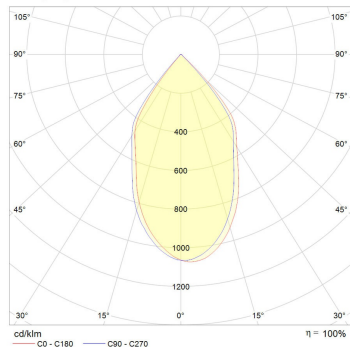

Stirling Square 36°

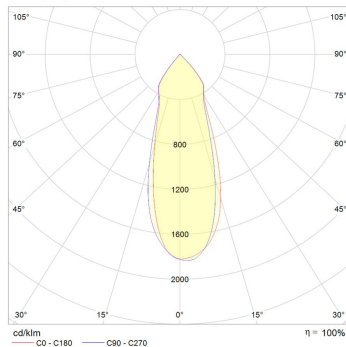

Stirling Square 59°

