

Stanley

SPOTLIGHT



Product Code

MS13



Technical Description

Wash it all...

- Our popular wall-washing spotlight which provides an even light distribution
- Available in precise narrow 2-step binning, significantly reducing power consumption while complying with the latest BCA regulations for retail spaces
- Designed for effortless installation, Stanley includes a convenient click-in track adaptor and boasts an improved thermal design
- Improved efficacy (up to 150lm/W at CRI90) with our new Mondolux HE+ chip*
- LED Source available as standard – [High Efficacy](#) with optional LED Source (available upon request) – [VIVID](#) and [ComfoLED](#)
- If you require a customised version of this product, please [contact us](#)

*Applicable for HE+ version

Electrical Specifications


System Power	27W, 35W, 43W
Input Voltage	240V
Control Type	ON/OFF
System Efficacy (max.)	150lm/W
Power Factor	> 0.9

Physical Characteristics

Installation Method	3-Circuit In-Track Mounted
Trim Finish	White, Black
IP Rating / IK Rating	IP20
Fitting Material	Aluminium

Photometric Info

Luminaire Lumens	2520lm, 3240lm, 3870lm, 4040lm, 4915lm, 5730lm
CRI	CRI90
CCT	3000K, 3000K HE+, 3500K, 3500K HE+, 4000K, 4000K HE+
Beam Angle	86°x59°
Lumen Maintenance	> 50000hrs
MacAdam Step	3 Step

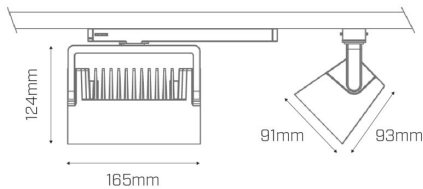

Polar Distribution Diagrams

Stanley 86° x 59°

