

Double up...



- Available in adjustable and trimless recessed installation options
- Two fully directional gimbal heads adjustable to max. 36°
- Accommodates multiple wattage options 7W / 13W / 18W
- Phase-Cut, DALI and Casambi Wireless dimmability options available
- For any custom requirements, please contact us

Product info

System Lumen Range	1350lm — 3660lm
System Power	14W, 26W, 36W
Forward Current	180mA, 350mA, 500mA
System Efficacy (max.)	102lm/W
Body/Trim Colour	White, Black
Installation Method	Adjustable Recessed, Trimless Adjustable Recessed
LED Brand	CREE, Bridgelux
Dimming Type	Phase-Cut Dimmable, Wireless Dimmable (Casambi), Non-Dimmable, DALI Dimmable
Accessories	Without Accessory, Deep Baffle-Diamond, Deep Baffle-Frosted, Deep Baffle-IP44, Deep Baffle-Line, Diamond Diffuser, Frosted Diffuser, Honeycomb Louvre, IP44 Diffuser, Line Diffuser


Photometric info

Colour Rendering Index (CRI)	CRI90, CRI97+
Colour Temperature (CCT)	2700K, 3000K, 4000K, Dim To Warm
Beam Angle	15°, 30°, 50°

Compliance and Features




Malo Duo Trimless 14W

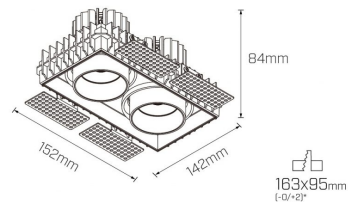


*allowed tolerance in mm

Malo Duo Trimless 26W

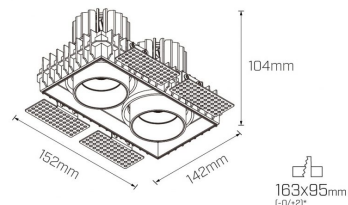

*allowed tolerance in mm

Malo Duo Trimless 36W

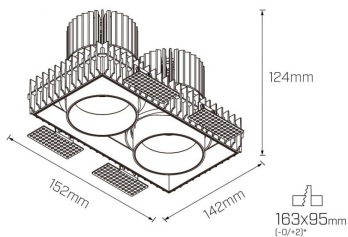

*allowed tolerance in mm

Malo Duo Trimless


DOWNLIGHT | Product code MD46

Packaging


Box Dimensions L x W x H mm	110 mm x 110 mm x 200 mm
Boxes per Carton	24
Carton Weight	12 KG
Carton Dimensions L x W x H mm	450 mm x 340 mm x 410 mm

Polar distribution diagrams

*Malo 7W/13W/18W 15°

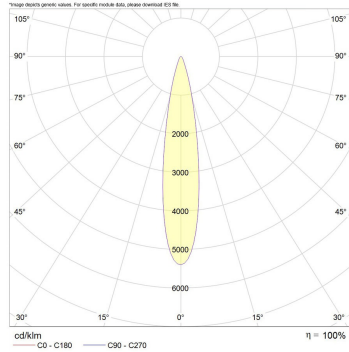

*Malo 7W/13W/18W 30°

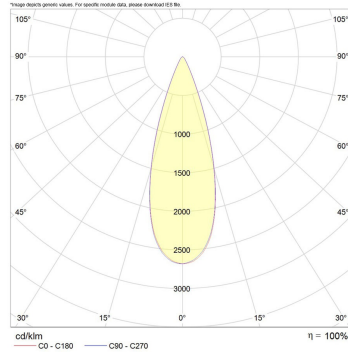

*Malo 7W/13W/18W 50°

