

Hartley

SPOTLIGHT



Product Code

MS40



Technical Description

The perfect combination

- Compact size
- High efficacy upto 89lm/W
- Integral driver
- Very low glare
- If you require a customised version of this product, please [contact us](#)
- Optional LED Source (On Request) - [Vivid](#), [ComfoLED](#), High Efficiency

Electrical Specifications


System Power	32W
Input Voltage	240V
Control Type	ON/OFF
System Efficacy (max.)	89lm/W
Power Factor	> 0.9

Photometric Info

Luminaire Lumens	2860lm
CRI	CRI90
CCT	3000K, 4000K
Beam Angle	15°, 25°, 35°, 50°
Lumen Maintenance	> 50000hrs
MacAdam Step	3 Step


Physical Characteristics

Installation Method	3-Circuit Track Mounted
Trim Finish	White, Black
IP Rating / IK Rating	IP20
Weight	0.8Kgs
Maximum Tilt Angle	95°
Maximum Rotation Angle	350°
Fitting Material	Aluminium

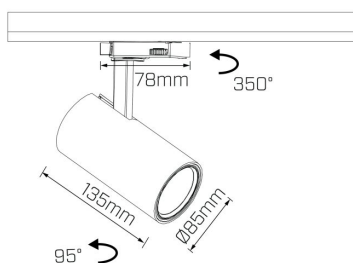


Polar Distribution Diagrams


Hartley 32W 36°

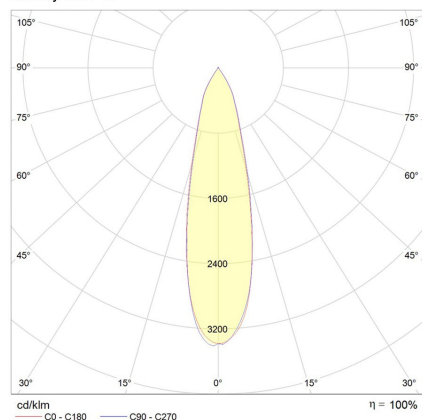

Hartley 32W 24°

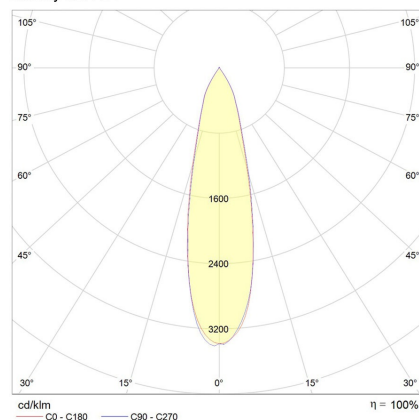

Hartley 32W 15°

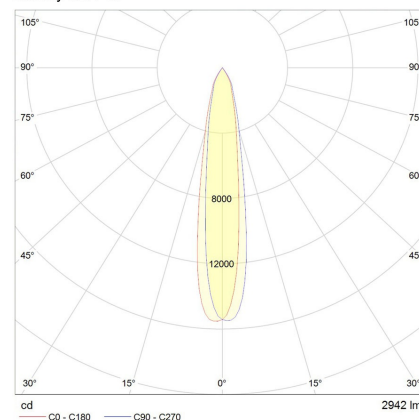

Hartley

SPOTLIGHT

Hartley 32W 55°

