



Product Code

MS06

RoHS

CE



Technical Description

Compact and discreet

- Can be both track and surface mounted
- High LOR of >88%
- Tilttable 0° to 90°
- Features enhanced lighting capabilities with a honeycomb louvre accessory option
- If you require a customised version of this product, please [contact us](#)

Electrical Specifications



System Power	20W
Input Voltage	240V
Control Type	ON/OFF, Phase-Cut
System Efficacy (max.)	80lm/W

Photometric Info

Luminaire Lumens	1600lm
CRI	CRi90
CCT	3000K, 3500K, 4000K
Beam Angle	12°, 20°, 35°


Physical Characteristics

Installation Method	3-Circuit Track Mounted, Surface Mounted
Trim Finish	White, Black
IP Rating / IK Rating	IP20
Accessories	Without Accessory, Honeycomb Louvre
Weight	1.3Kgs
Maximum Tilt Angle	90°
Maximum Rotation Angle	355°




Polar Distribution Diagrams

Napoli 34°

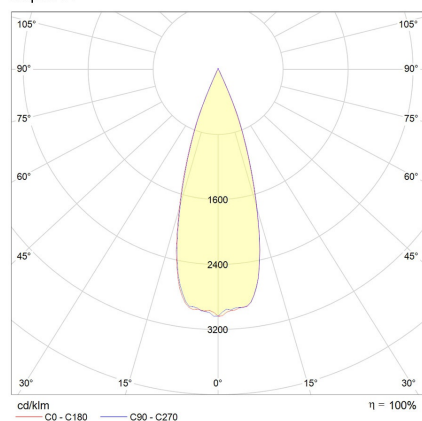

Napoli 12°

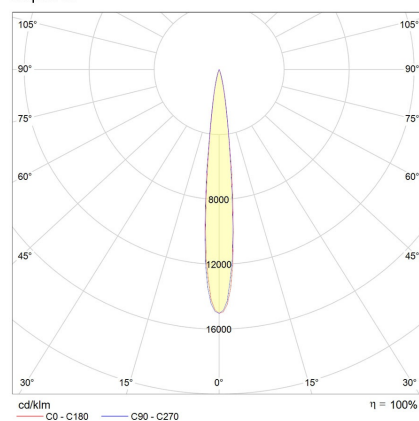

Napoli 20°

