


Contoured execution



- Trim Ø142mm, cut-out Ø135mm
- Wide range of beamspreads: 15°, 24°, 38°, 55°
- Available in 13W, 19W, 28W, 36W

Product info

System Lumen Range	850lm — 2400lm
System Power	13W, 19W, 28W, 36W
Forward Current	350mA, 500mA, 700mA, 900mA
System Efficacy (max.)	67lm/W
Input Voltage	240V
Body/Trim Colour	White, Black
Installation Method	Adjustable Recessed
LED Brand	Citizen
IP Rating	IP20
Diffuser	Clear
Dimming Type	Non-Dimmable
Accessories	Without Accessory
Custom Dimming Type	Available on request



Photometric info

Colour Rendering Index (CRI)	CRI90
Colour Temperature (CCT)	3000K, 3000K Vivid, 3500K, 3500K Vivid, 4000K, 4000K Vivid
Beam Angle	15°, 24°, 38°, 55°
Custom Colour Temperature (CCT)	Available on request

Compliance and Features

RoHS




Packaging

Box Weight	1.2kg
Box Dimensions L x W x H mm	180 mm x 140 mm x 140 mm
Boxes per Carton	18
Carton Dimensions L x W x H mm	470 mm x 310 mm x 470 mm

Polar distribution diagrams

Lecce 15°

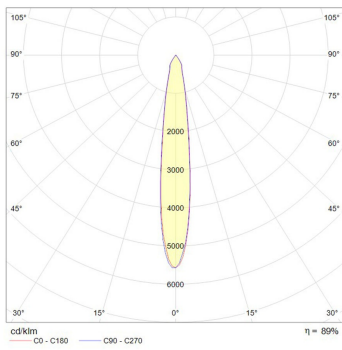

Lecce 24°

