


## Solid modesty



- Phase Cut and DALI Dimmability options are available
- Flexible mounting clip to accommodate ceiling thicknesses ranging from 5mm to 30mm
- Trim Ø160mm, cut-out Ø150mm, 13W - 50W
- 30° maximum tilt angle

### Product info

System Lumen Range	950lm — 4400lm
System Power	13W, 20W, 27W, 36W, 43W, 50W
Forward Current	350mA, 500mA, 700mA, 900mA, 1050mA, 1200mA
System Efficacy Range	73lm/W to 88lm/W
Input Voltage	240V
Body/Trim Colour	White, Black
Installation Method	Adjustable Recessed
LED Brand	Citizen
IP Rating	IP20
Diffuser	Clear
Dimming Type	Non-Dimmable, Phase-Cut Dimmable
Maximum Tilt Angle	30°
Maximum Rotation Angle	355°
Accessories	Without Accessory
Custom Dimming Type	Available on request



### Photometric info

Colour Rendering Index (CRI)	CRI90
Colour Temperature (CCT)	3000K, 3000K Vivid, 3500K, 3500K Vivid, 4000K, 4000K Vivid
Beam Angle	10°, 18°, 28°, 48°
Light Output Ratio (LOR)	>87%
Custom Colour Temperature (CCT)	Available on request

## Compliance




## Packaging


Box Weight	1 kg
Box Dimensions L x W x H mm	180 mm x 180 mm x 155 mm
Boxes per Carton	12
Carton Dimensions L x W x H mm	370 mm x 370 mm x 470 mm

## Polar distribution diagrams

Polar 18°

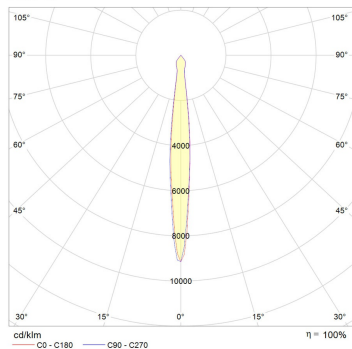

Polar 29°

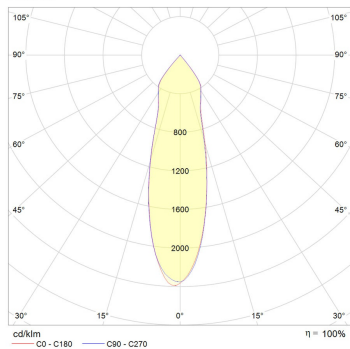

Polar 48°

