

Lucca Mini Adjustable

DC LOW
VOLTAGE

Product code MV52

MONDOLUX™
mondolux.com.au


Take aim



- Powerful & compact design- 9 LED tiltable grid model
- Multiple beam angle options available of 15°, 24°, 36°
- Great adjustability with maximum tilt angle up to 135°
- Perfectly suited for retail, hospitality, residential & ornamental lighting.
- Low unified glare rating (UGR)*

Product info

System Lumen Range	900lm
System Power	11W
Forward Current	350mA
System Efficacy	82lm/W
Input Voltage	48V DC
Body/Trim Colour	White, Black
Installation Method	DC-Track Recessed
IP Rating	IP20
Dimming Type	Non-Dimmable, DALI Dimmable
Accessories	Without Accessory

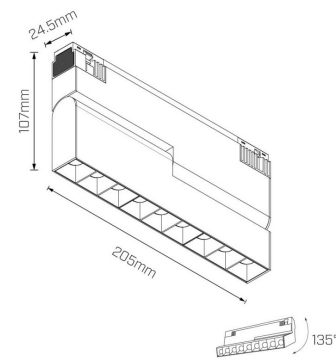

Photometric info

Colour Rendering Index (CRI)	CRI90
Colour Temperature (CCT)	3000K, 4000K
Beam Angle	15°, 24°, 36°

Lucca Mini Adjustable


DC LOW
VOLTAGE

Product code MV52


MONDOLUX™
mondolux.com.au

Polar distribution diagrams

Lucca Mini Adjustable 15°

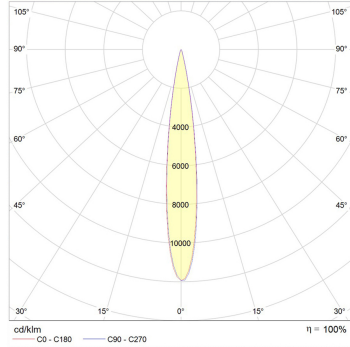

Lucca Mini Adj 24°

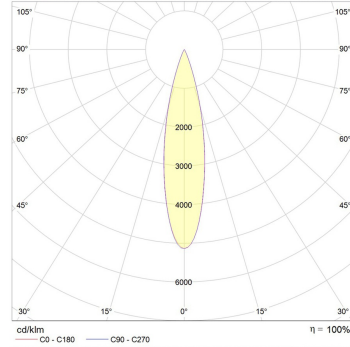

Lucca Mini Adj 36°

