

Lucca Mini Adjustable

DC LOW VOLTAGE

Product Code

MV52



RoHS



Technical Description

Low-glare lovin'... and adjustable!

- Part of the Mondolux Pacto DC48V low-voltage range, with our signature Cross-Beam Lens technology for increased efficacy
- Powerful and compact design with a 9-LED tiltable grid model, with in-track installation to reduce visual bulk and maintain clean lines
- The deep-baffle darklight design reduces glare and ensures excellent optical comfort
- Great adjustability with a maximum tilt angle up to 135°
- Multiple beam angle options available of 15°, 24°, 36°
- Modular 48V click-in system for flexibility and easy installation
- Also available in [Fixed](#) and [Wall Washer](#) versions
- Non-dimmable and PWM DALI control options (Casambi Wireless Control available upon request)
- If you require a customised version of this product, please [contact us](#)

Electrical Specifications


System Power	11W
Input Voltage	48V DC
Control Type	ON/OFF, DALI
System Efficacy (max.)	82lm/W

Photometric Info

Luminaire Lumens	900lm
CRI	CRi90
CCT	3000K, 4000K
Beam Angle	15°, 24°, 36°


Physical Characteristics

Installation Method	DC-Track Recessed
Trim Finish	White, Black
IP Rating / IK Rating	IP20
Fitting Material	Aluminium

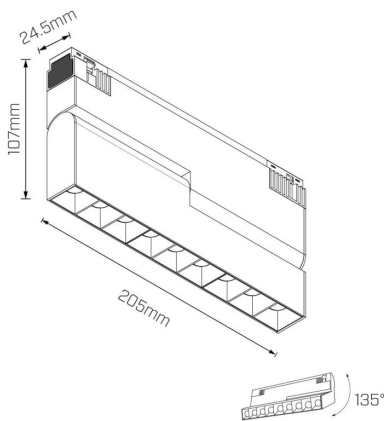


Polar Distribution Diagrams

Lucca Mini Adj 36°

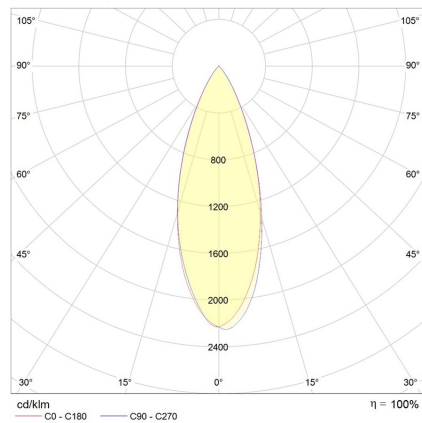

Lucca Mini Adj 24°

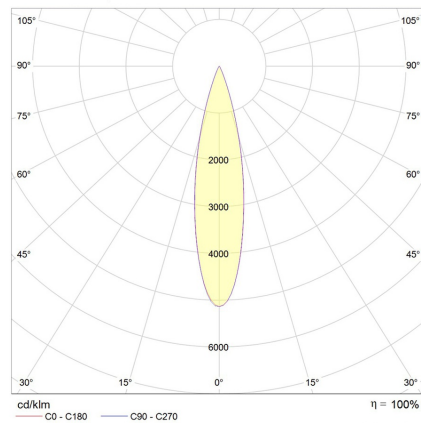

Lucca Mini Adjustable 15°

