

## Burano Mini

DC LOW VOLTAGE



## Product Code

MV12



## Technical Description

## Sophisticated simplicity

- Part of the Mondulux Pacto DC48V low-voltage range, with our signature Cross-Beam Lens technology for increased efficacy
- The larger pendant of the Burano family, with in-track installation to reduce visual bulk and maintain clean lines
- Multiple beam angle options available of 21°, 33° and 42°
- Configure with Honeycomb Louvre, Snoot, Oval Snoot, Line Diffuser or Frosted Diffuser accessories (available on request) to further minimise glare, soften distribution and customise aesthetic appearance
- Modular 48V click-in system for flexibility and easy installation
- Also available in [Tiny](#) size
- Non-dimmable and PWM DALI control options (Casambi Wireless Control available upon request)
- If you require a customised version of this product, please [contact us](#)

## Electrical Specifications


System Power	20W
Input Voltage	48V DC
Control Type	ON/OFF, DALI
System Efficacy (max.)	63lm/W

## Photometric Info

Luminaire Lumens	1260lm
CRI	CRi90
CCT	3000K, 4000K
Beam Angle	21°, 33°, 42°


## Physical Characteristics

Installation Method	DC-Track Suspended
Trim Finish	White, Black
IP Rating / IK Rating	IP20
Fitting Material	Aluminium

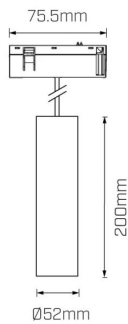


## Polar Distribution Diagrams

Burano Mini 33°

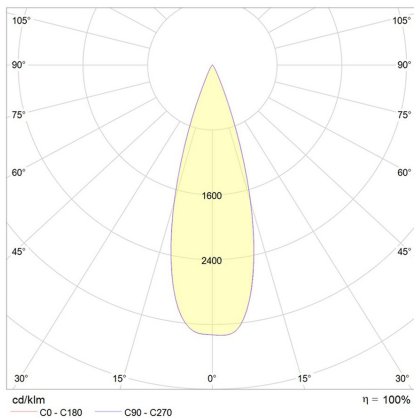

Burano Mini 21°

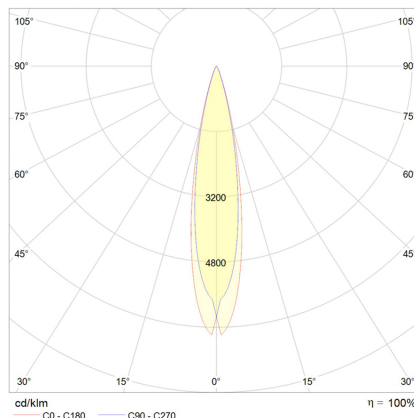

Burano Mini 42°

