

Product Code

MO71



Technical Description

Captivating with durability...

- Outdoor uplight designed for commercial outdoor use
 - Highly efficient, robust performance
 - Exceptional IP67 and IK09 ratings with CRI90 as standard, low glare design and a 5-year warranty*
 - 316 Stainless Steel trim with drive-over load rating of up to 2000Kg
 - Marine grade powder coat available on request
 - Variants include Mini, Midi and Maxi sizes and wall washer options
 - Local stock availability
 - If you require a customised version of this product, please [contact us](#)
- *Please see Warranty Terms & Conditions for further information.

Electrical Specifications

System Power	3W
Input Voltage	24V DC
Control Type	ON/OFF
System Efficacy (max.)	27lm/W

Physical Characteristics


Installation Method	Fixed Recessed
Trim Finish	316 Stainless Steel
IP Rating / IK Rating	IP67/ IK06
Weight	0.3Kgs
Fitting Material	Aluminium & 316 Stainless Steel

Photometric Info


Luminaire Lumens	80lm
CRI	CRI90
CCT	3000K
Beam Angle	16°, 24°, 40°
Lumen Maintenance	> 52, 000hrs (L70 B10)
MacAdam Step	3 Step

Polar Distribution Diagrams


Verne Tiny 16°

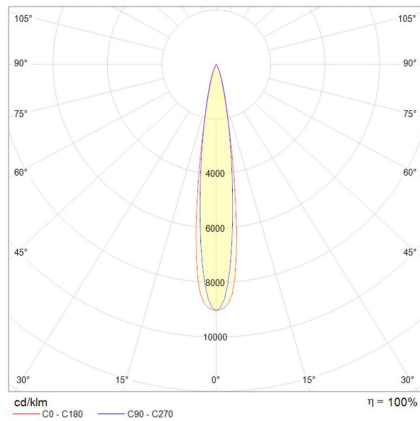


Verne Tiny 40°

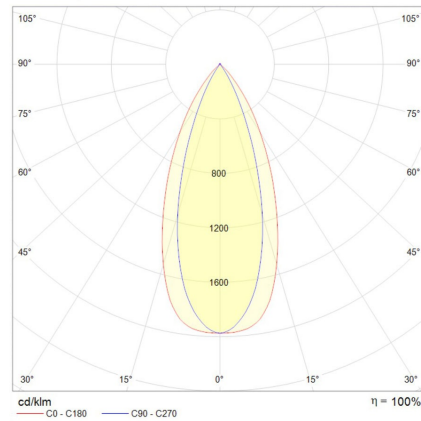

Verne Tiny 24°

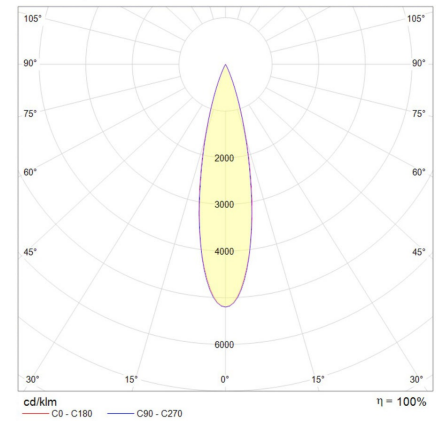

Product Accessories

Item	Code	Description
	MAO71HC2	Mondolux Accessories Outdoor Uplight Verne Tiny Honeycomb Louvre Black