

Cori Midi

DOWNLIGHT

Product Code

MD59



Technical Description

The all weather wonder...

- Specifically designed for commercial outdoor applications
- Robust performance with exceptional IP65 and IK09 ratings
- UV-stabilised matte finish (Marine Grade Powdercoat and other finishes available on request)
- With a 5-year warranty* as standard, this downlight will go the distance on your projects
- Also available in Tiny and Mini size options
- Local stock availability
- Available in 15°, 25° and 40° optics
- If you require a customised version of this product, please [contact us](#)

*Please see Warranty Terms & Conditions for further information.

Electrical Specifications


System Power	30W
Input Voltage	240V
Control Type	ON/OFF, DALI, Casambi
System Efficacy (max.)	79lm/W
Power Factor	> 0.9

Photometric Info

Luminaire Lumens	2375lm
CRI	CR180
CCT	2700K, 3000K, 4000K
Beam Angle	15°, 25°, 40°
Lumen Maintenance	> 62, 850hrs (L70 B10)
MacAdam Step	3 Step


Physical Characteristics

Installation Method	Fixed Recessed
Trim Finish	White, Black
IP Rating / IK Rating	IP65
Fitting Material	Aluminium

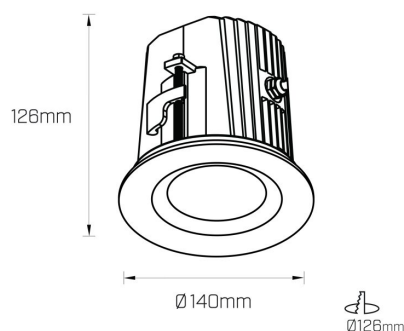


Polar Distribution Diagrams

Cori Midi 15°

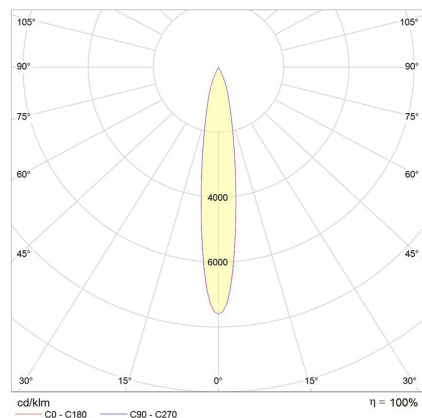

Cori Midi 25°

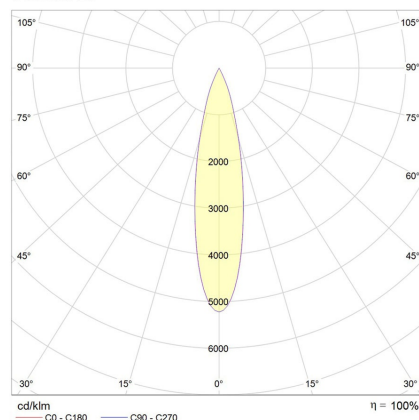

Cori Midi 40°

