

Cori Midi

DOWNLIGHT



Product Code

MD59



Technical Description

The all weather wonder...

- Specifically designed for commercial outdoor applications
 - Robust performance with exceptional IP65 and IK09 ratings
 - UV-stabilised matte finish (Marine Grade Powdercoat and other finishes available on request)
 - With a 5-year warranty* as standard, this downlight will go the distance on your projects
 - Also available in Tiny and Mini size options
 - Local stock availability
 - Available in 15°, 25° and 40° optics
 - If you require a customised version of this product, please [contact us](#)
- *Please see Warranty Terms & Conditions for further information.

Electrical Specifications


System Power	30W
Input Voltage	240V
Control Type	ON/OFF, DALI, Casambi
System Efficacy (max.)	79lm/W
Power Factor	> 0.9

Physical Characteristics

Installation Method	Fixed Recessed
Trim Finish	White, Black
IP Rating / IK Rating	IP65
Fitting Material	Aluminium


Photometric Info

Luminaire Lumens	2375lm
CRI	CRI80
CCT	2700K, 3000K, 4000K
Beam Angle	15°, 25°, 40°
Lumen Maintenance	> 62, 850hrs (L70 B10)
MacAdam Step	3 Step

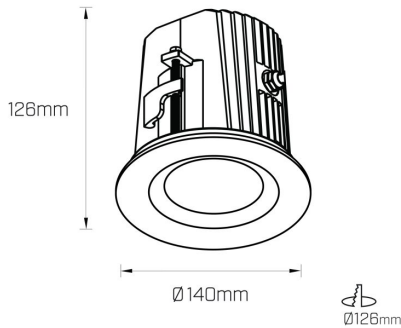


Polar Distribution Diagrams

Cori Midi 15°

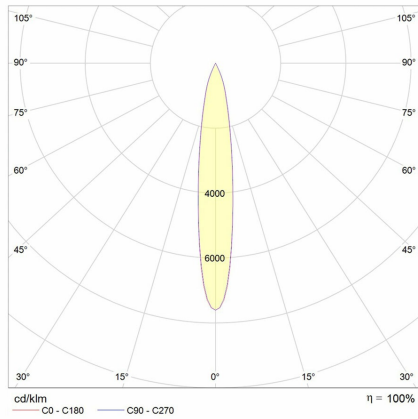

Cori Midi 25°

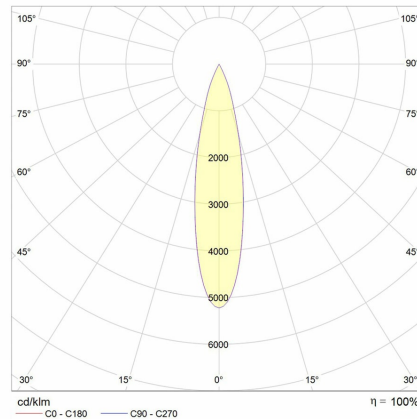

Cori Midi 40°

