

Catania Mini Pendant

PENDANT



Product Code
MN25



Technical Description

Hangin' with style

- A sleek and svelte architectural pendant at only Ø62mm
- Beam spreads: Spot (17°), Narrow (20°), Medium (40°), and Wide (55°)
- Can be fitted with a range of optical accessories upon request for enhanced glare control
- Cord length: 1630 mm
- Part of the Catania family, with [Mini Spotlight](#) and [Maxi Spotlight](#) versions available
- If you require a customised version of this product, please [contact us](#).

Electrical Specifications


| | |
|------------------------|----------------------------------|
| System Power | 15W |
| Input Voltage | 240V |
| Control Type | ON/OFF, Phase-Cut, DALI, Casambi |
| System Efficacy (max.) | 83lm/W |

Physical Characteristics

| | |
|-----------------------|--------------|
| Installation Method | Suspended |
| Trim Finish | White, Black |
| IP Rating / IK Rating | IP20 |
| Weight | 0.6Kgs |


Photometric Info

| | |
|------------------|--------------------|
| Luminaire Lumens | 1250lm |
| CRI | CRI90 |
| CCT | 3000K, 4000K |
| Beam Angle | 17°, 20°, 40°, 55° |

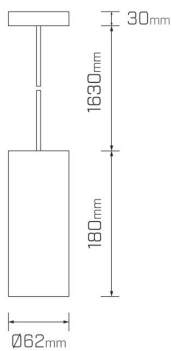


Polar Distribution Diagrams


Catania Mini Pendant 55°

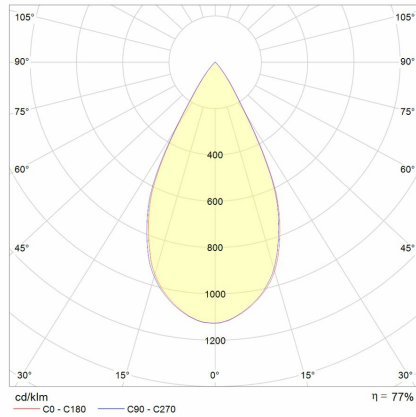

Catania Mini Pendant 40°

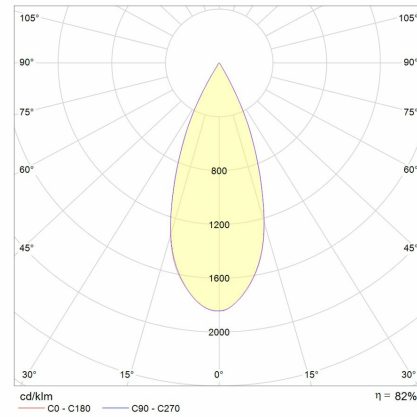

Catania Mini Pendant 20°

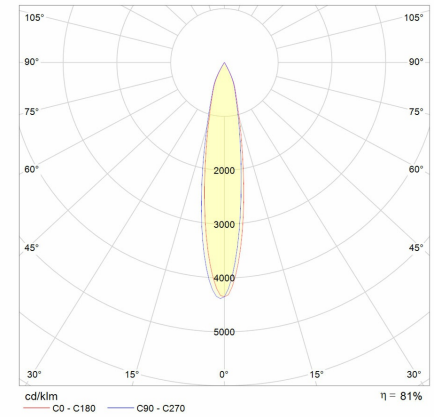

Catania Mini Pendant 17°

