

Catania Mini Pendant

PENDANT



Product Code

MN25



Technical Description

Hangin' with style

- A sleek and svelte architectural pendant at only Ø62mm
- Beam spreads: Spot (17°), Narrow (20°), Medium (40°), and Wide (55°)
- Can be fitted with a range of optical accessories upon request for enhanced glare control
- Cord length: 1630 mm
- Part of the Catania family, with [Mini Spotlight](#) and [Maxi Spotlight](#) versions available
- If you require a customised version of this product, please [contact us](#).

Electrical Specifications


System Power	15W
Input Voltage	240V
Control Type	ON/OFF, Phase-Cut, DALI, Casambi
System Efficacy (max.)	83lm/W

Physical Characteristics

Installation Method	Suspended
Trim Finish	White, Black
IP Rating / IK Rating	IP20
Weight	0.6Kgs


Photometric Info

Luminaire Lumens	1250lm
CRI	CRI90
CCT	3000K, 4000K
Beam Angle	17°, 20°, 40°, 55°

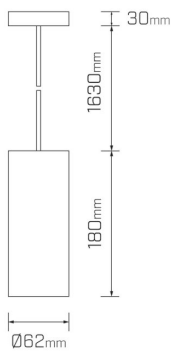


Polar Distribution Diagrams


Catania Mini Pendant 55°

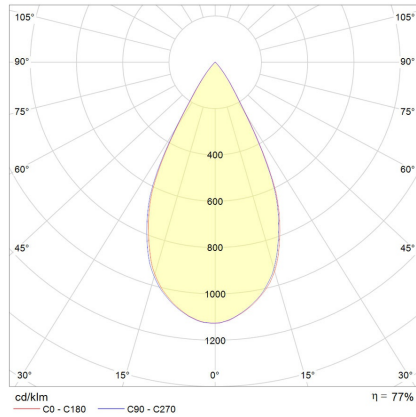

Catania Mini Pendant 40°

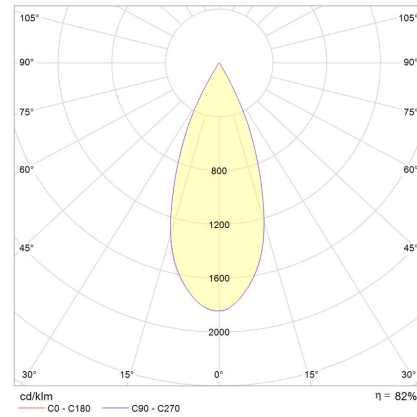

Catania Mini Pendant 20°

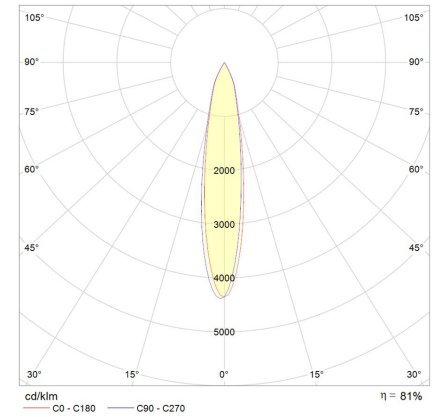

Catania Mini Pendant 17°

