

Product Code

MO72

Technical Description

Captivating with durability...

- Outdoor uplight designed for commercial outdoor use
- Highly efficient, robust performance
- Exceptional IP67 and IK09 ratings with CRI90 as standard, low glare design and a 5-year warranty\*
- 316 Stainless Steel trim with drive-over load rating of up to 2000Kg
- Marine grade powder coat available on request
- Variants include Tiny, Midi and Maxi sizes along with Midi wall washer options
- Local stock availability
- If you require a customised version of this product, please [contact us](#)

\*Please see Warranty Terms & Conditions for further information

Electrical Specifications


System Power	6W
Input Voltage	24V DC
Control Type	ON/OFF
System Efficacy (max.)	36lm/W

Physical Characteristics

Installation Method	Fixed Recessed
Trim Finish	316 Stainless Steel
IP Rating / IK Rating	IP67/ IK09
Weight	1.2Kgs
Fitting Material	Aluminium & 316 Stainless Steel


Photometric Info

Luminaire Lumens	215lm
CRI	CRI90
CCT	3000K
Beam Angle	13°, 36°, 54°
Lumen Maintenance	>52, 000hrs (L70 B10)
MacAdam Step	3 Step

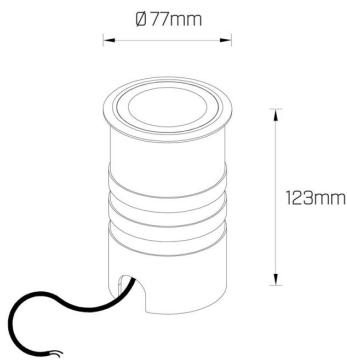


Polar Distribution Diagrams

Verne Mini 54°

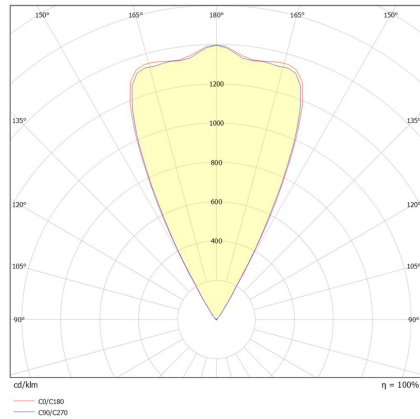

Verne Mini 13°

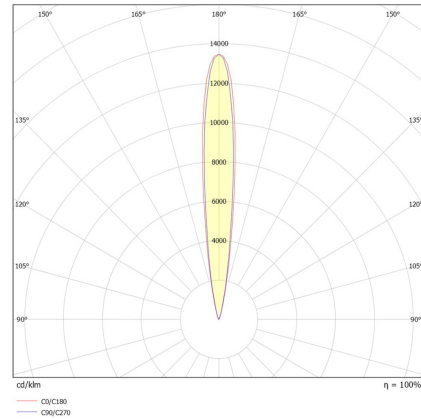

Verne Mini 36°

