

## Product Code

MO32



## Technical Description

## Outdoor highlighting with style...

- Outdoor spotlight designed for commercial outdoor use
- Highly efficient, robust performance
- Exceptional IP66 and IK06 ratings with CRI90 as standard and a 5-year warranty\*
- Cross beam Gen-2 lens
- UV stabilised matte finish in black (Marine grade powder coat available on request)
- Also available in Mini, Maxi and Maxi HP versions with various mounting and glare control accessories
- 240V version available on special order
- Local stock availability
- If you require a customised version of this product, please [contact us](#)

\*Please see Warranty Terms &amp; Conditions for further information.

## Electrical Specifications



System Power	11W
Input Voltage	24V DC
Control Type	ON/OFF
System Efficacy (max.)	81lm/W

## Photometric Info

Luminaire Lumens	890lm
CRI	CRI90
CCT	3000K
Beam Angle	20°, 33°, 46°
Lumen Maintenance	>55, 400hrs (L70 B10)
MacAdam Step	3 Step


## Physical Characteristics

Installation Method	Surface Mounted
Trim Finish	Black
IP Rating / IK Rating	IP66/ IK06
Weight	0.76Kgs
Maximum Tilt Angle	90°
Maximum Rotation Angle	170°
Fitting Material	Aluminium

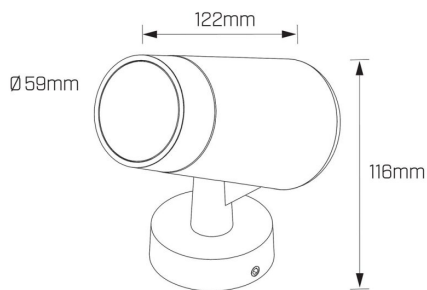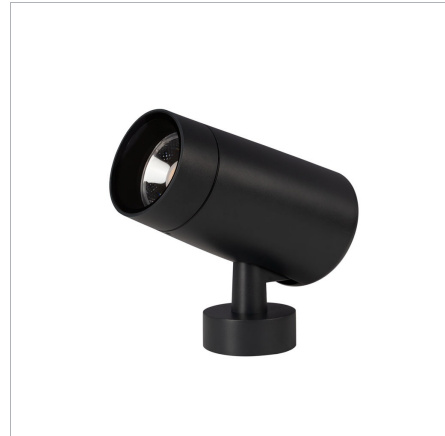


## Polar Distribution Diagrams

Thomas Midi 46°

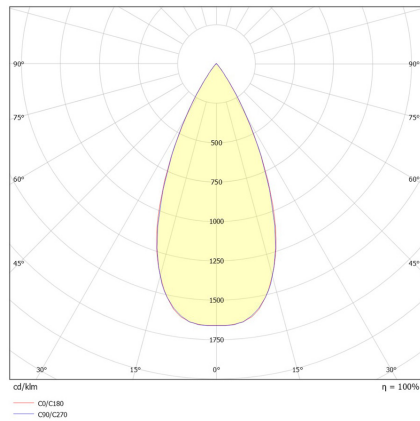

Thomas Midi 20°

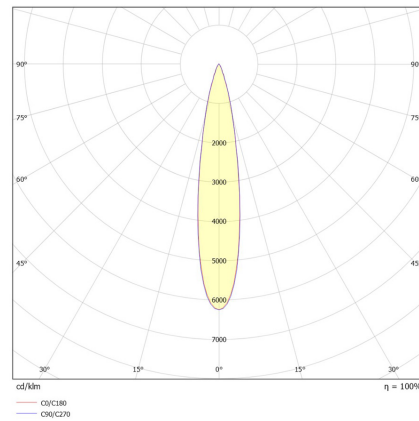

Thomas Midi 33°

