


## Mons-D Louvre

## TRUNKING SYSTEMS

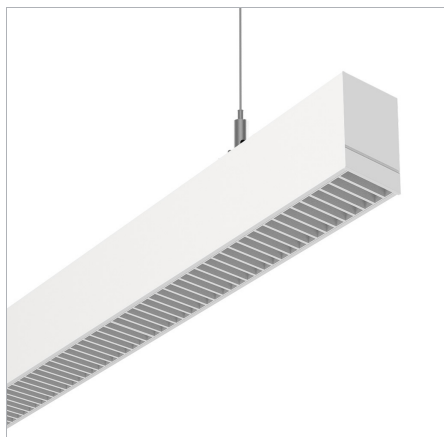

## Product Code

MR22,MR25



## Technical Description

## The complete solution...

- Introducing Mons-D Louvre LED Trunking system; clean and sleek design aesthetic ideal for commercial, architectural and residential lighting applications
- Saving energy: Improved efficiency, up to 70lm/W at CRI90
- Saving installation costs: Modular and tool-free operation
- Saving maintenance costs: 5 years warranty\*
- Amazing add-on features: Emergency/Sensor/Dimming/Track modules
- Pre-wired trunking rail with 7 wires and 3 pins for easy phase selection
- For more information watch the Video [here](#)
- If you require a customised version of this product, please [contact us](#)

\*Please see Warranty Terms &amp; Conditions for further information.

## Electrical Specifications



System Power	21W, 27W, 30W, 37W
Input Voltage	240V
Control Type	ON/OFF, 0-10V, DALI, Casambi
System Efficacy (max.)	70lm/W
Power Factor	> 0.9

## Photometric Info

Luminaire Lumens	1470lm, 1890lm, 2100lm, 2590lm
CRI	CRI90
CCT	3000K, 4000K
Beam Angle	76°
Lumen Maintenance	> 54, 000hrs (L70 B30)
MacAdam Step	3 Step


## Physical Characteristics

Installation Method	Surface Mounted / Suspended
Trim Finish	White, Black
IP Rating / IK Rating	IP50/ IK05
Accessories	Black Louvre, White Louvre
Weight	4.2Kgs
Fitting Material	Aluminium

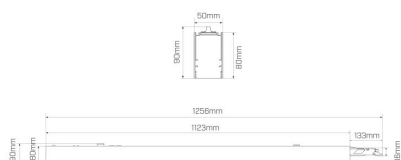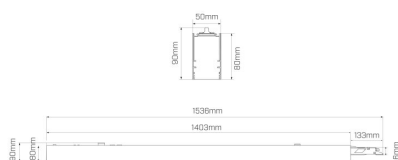

## Polar Distribution Diagrams

Mons-D Louvre 76°

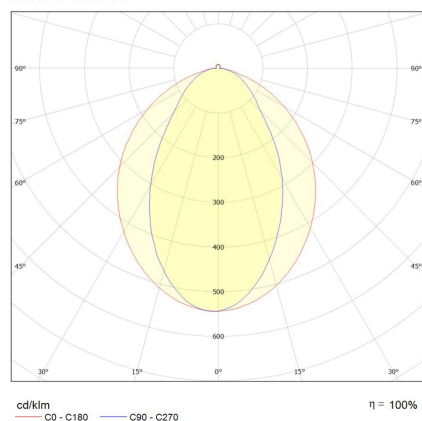cd/klm  
C0 - C180 C90 - C270 $\eta = 100\%$