


# T-Bar Micro Prismatic Lumo 1195mm x 295mm x 10mm

PANEL



Product Code  
MP23

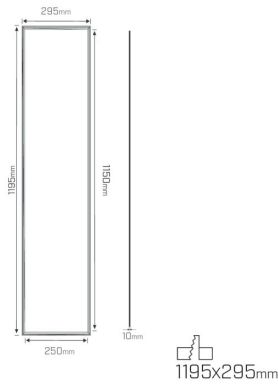

## Technical Description

### The ultimate efficiency upgrade

- This product has been phased out and is available in limited quantities.
  - New low glare Micro Prismatic T-Bar Lumo 1195mm x 295mm x 10mm with exceptional UGR<19° rating
  - Beam angle of 83°
  - UV stable PMMA light guiding plate prevents discolouring over time
  - Highly efficient 100lm/W on average
  - If you require a customised version of this product, please [contact us](#).
- \*UGR values are subject to independent lighting design based on room size and mounting heights.

## Electrical Specifications

System Power	36W
Input Voltage	240V
Control Type	ON/OFF, 0-10V, Phase-Cut, DALI, Casambi
System Efficacy (max.)	103lm/W
Power Factor	>0.9

## Physical Characteristics


Installation Method	Fixed Recessed
Trim Finish	White
IP Rating / IK Rating	IP20
Fitting Material	Aluminium

## Photometric Info

Luminaire Lumens	3700lm
CRI	CR180
CCT	3000K, 4000K
Beam Angle	83°
Lumen Maintenance	>50000hrs (L80B20)

## Polar Distribution Diagrams

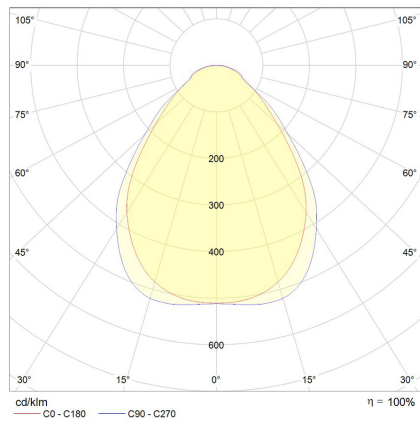

Lumo Low Glare 83°



## T-Bar Micro Prismatic Lumo 1195mm x 295mm x 10mm

PANEL

## Product Accessories

Item	Code	Description
	MAP23PF1	Mondolux Accessories Lumo Panel Fixed Recessed Plaster Frame White 1235mmx335mmx25mm Cut-Out 1225mmx325mm C/W 4x Metal Splicing Connectors + 4x Spring Clips + 4x Screws (Suitable For 1195mm x 295mm x 10mm)
	MAP23SF1	Mondolux Accessories Lumo Panel Surface Mounted Frame White 1200mmx300mmx63mm C/W 4x Metal Splicing Connectors + 4x Screws (Suitable For 1195mm x 295mm x 10mm)