

Benson Fixed

DOWNLIGHT



Product Code
MD07FR



Technical Description

A proven performer


- This product has been phased out and is available in limited quantities. For ongoing availability, please see the [Esen](#).
- A venerated all-rounder, the Benson is suitable for residential, commercial, retail and architectural applications
- The low-glare reflector and deep baffle ensure optimum visual comfort, whilst large cut-out enables practical installation
- Beam angle options: 25°, 35° and 60°
- Available in both Fixed and [Adjustable](#) versions
- Comes with IP40 protection
- If you require a customized version of this product, please [contact us](#)

Electrical Specifications

System Power	9W, 13.5W
Input Voltage	240V
Control Type	ON/OFF, Phase-Cut, DALI, Casambi
System Efficacy (max.)	73lm/W
Power Factor	> 0.9

Physical Characteristics

Installation Method	Fixed Recessed
Trim Finish	White, Black
IP Rating / IK Rating	IP40
Weight	1Kgs
Fitting Material	Aluminium




Photometric Info


Luminaire Lumens	660lm, 970lm
CRI	CRI90
CCT	2700K, 3000K, 4000K
Beam Angle	25°, 35°, 60°
Lumen Maintenance	> 50, 000hrs (L70 B10)
MacAdam Step	3 Step

Polar Distribution Diagrams

Benson Fixed 60°

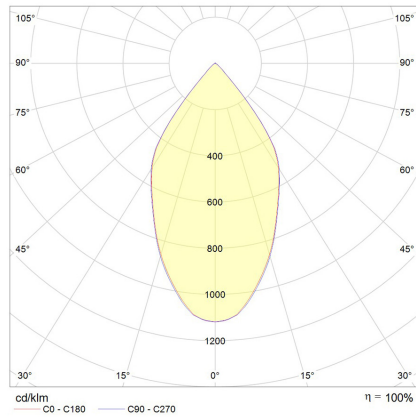

Benson Fixed 25°

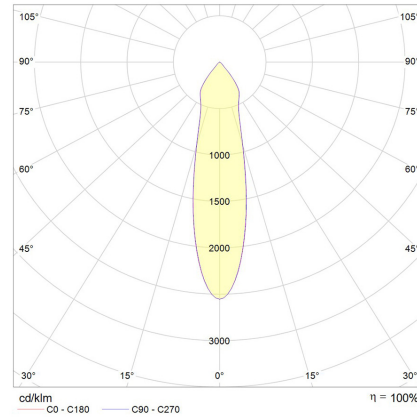

Benson Fixed 35°

